

35714 U.S. PTO

09664390 094800

PRAXAIR TECHNOLOGY, INC.

Law Department
Patent Section M1-557
LOCAL TELEPHONE CONTACT:

30 Old Ridgebury Road
Danbury, CT 06810-5113

Docket No. 20846

3525 U.S. PTO
09/664390
09/18/00

To: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

Transmitted herewith for filing is the UTILITY PATENT APPLICATION under 37 C.F.R. §1.53(b) of:

First Inventor Frank Notaro

Title of invention LOW VOID ADSORPTION SYSTEMS AND USES THEREOF

1. ☐ Cancel Claims:

☒ Filing Fee, calculated as follows:

CLAIMS AS FILED, LESS ANY CLAIMS CANCELLED BY AMENDMENT							
	<u>NUMBER FILED</u>		<u>NUMBER EXTRA</u>		<u>\$ RATE</u>	<u>\$ RATE</u>	<u>FEE CODE</u>
Basic fee						690	101
Total claims	<u>20</u>	-20	<u>0</u>	x	18 =	<u>0</u>	103
Independent claims	<u>3</u>	-3	<u>0</u>	x	78 =	<u>0</u>	102
Multiple dependent claims(s) per Application (if applicable)				+	260 =	0	104
Total filing fee						\$ <u>690</u>	

The Commissioner is hereby authorized to charge the following fees, and credit any overpayment to Deposit Account No. 16-2440 (a duplicate copy of this Sheet is enclosed for this purpose):

- a. ☒ Filing Fees required under 37 C.F.R. §1.16
b. ☒ Processing Fees required under 37 C.F.R. §1.17
c. ☐ Issue Fees required under 37 C.F.R. §1.18

2. ☒ Specification Total Pages: 31

3. ☒ Informal ☐ Formal drawings Total Sheets: 10

4. a. ☒ New Declaration (Signed) (Unsigned) ☒

b. ☐ Copy from a prior application (37 C.F.R. §1.63(d))

i. DELETION OF INVENTOR(S)

Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. §§1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (usable if Box 4b is checked)

The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered to be part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

6. ☐ Microfiche.

7. ☐ Sequence Submission.
8. ☐ An Assignment transmittal letter and document or ☐ Assignment in parent case was recorded _____ Reel, Frame(s) _____.
9. ☐ A Power of Attorney executed by the ☐ Inventor(s), ☐ Assignee (with 37 C.F.R. 3.73(b) Statement).
10. ☐ English Translation.
11. ☒ An Information Disclosure Statement.
☒ A list of references (Form PTO-1449).
☒ Copies of references.
12. ☐ Preliminary Amendment.
13. ☒ Postcards.
14. ☐ Other (specify). _____

15. Amend the specification by inserting before the first line, the sentence:

"This is a ☐ Continuation ☐ Division ☐ Continuation-in-Part of prior U.S. Application(s) No. _____ Filing Date _____ and which in turn is a _____ of Application No. _____ Filing Date _____."

16. ☐ Prior application information: Examiner _____ Group Art Unit _____

17. Claim for Priority Under 35 U.S.C. 120:

- ☐ The benefit under 35 U.S.C. 120 is hereby claimed from the United States application(s) identified in Box 15 above.

18. Claim for Priority Under 35 U.S.C. 119:

- ☐ The benefit of priority under 35 U.S.C. 119 is hereby claimed from the following foreign application(s)
- ☐ Certified copy of Priority Document(s).

19. Please address all correspondence in connection with this application to:

PRAXAIR, INC.
LAW DEPT - M1557
39 OLD RIDGEBURY ROAD
DANBURY, CT 06810-5113
Telephone (203) 837- 2363
Fax (203) 837-2545

Robert J. Follett
Attorney's Name: Robert J. Follett
Registration No.: 39566

Dated: 9/15/00 _____

Our Ref.: D-20846 _____

LOW VOID ADSORPTION SYSTEMS AND USES THEREOFField of the Invention

The present invention provides an improved
5 pressure swing adsorption system, and, more
particularly, a fast pressure swing adsorption system
with low void volume, improved flow distribution, and
enhanced process performance.

10 Background of the Invention

Adsorption processes have been widely used for the
separation and purification of gases. In recent years,
pressure swing adsorption (PSA) systems including
vacuum PSA (VPSA) have been developed for enhanced gas
15 separation operations, particularly for the commercial
production of oxygen and/or nitrogen from air. The PSA
process consists of basic steps such as adsorption-
desorption. Air or another gas mixture is fed into the
system, which includes one or more vessels, each with
20 an adsorbent bed, to an upper adsorption pressure. The
adsorbent beds (a.k.a. adsorbers) selectively adsorb
the more readily adsorbable component(s) of the air or
gas mixture. The less readily adsorbable component(s)
passes through the adsorber. The vessel is then
25 depressurized to a lower desorption pressure for the
desorption of the more readily adsorbable component(s)
from the adsorber(s), which is then repressurized to
the upper adsorption pressure as cyclic operation is
continued.

30 In order to improve performance, conventional PSA
systems typically use two or more vessels in parallel
with directional valves to connect the vessels in

- 2 -

alternating sequence to the compressor or vacuum pump. Further, to fully utilize the adsorbent material employed, PSA systems require uniform flow of gas across the adsorbent vessel(s) throughout the PSA processing cycle. In addition, void volume and pressure drops in the PSA vessel entrance and exit regions (i.e., the inlets and outlets and their associated headers) have adverse effects on the process performance of a PSA system and must be minimized in practical commercial operations. Ruthven, et al. disclose a method for estimating the magnitude of effects by void volume via an equilibrium model. More specifically, they examined the effects of void volume in a simple four-step cycle with a linear isotherm, and showed that large void volume could significantly reduce recovery. Unfortunately, the study applies to an idealized situation without consideration of mass transfer resistance, heat effect and isotherm non-linearity. In addition, only production end void volume and a simple cycle are investigated. US Patent 5,968,233 to Rouge, et al. discloses a similar conclusion of void effects for a more realistic air separation cycle. However, the patent focuses only on production end void volume. More importantly, the patent looks for an optimum void volume for oxygen cost, rather than a minimum void volume.

The effect of void volume varies depending on the location of the void (relative to the adsorbent) and on which step of the cycle the void is considered. For example, the light product gas in the production end void space serves, to some extent, as a purge gas during a countercurrent regeneration step; however,

Vessel system design is a classic approach, focusing only on the vessel or bed itself. Vessels are designed to improve flow distribution and minimize void spaces within the vessel ends (or headers) between the gas inlet (feed end) or outlet (production end) and the adsorbent. US Patent 5,759,242 to Smolarek, et al., which describes a radial adsorber, and US Patent 5,538,544 to Nowobilski, et al., which describes a conventional vertical adsorber, are two recent examples of this approach. However, the vessel design approach has its limits for reducing void space. With a given flow distributor, it can only decrease header space to a level where flow maldistribution and pressure drop are acceptable for the process. In addition, void spaces in distribution pipes are not addressed by this approach.

The single-vessel pressure swing adsorption system disclosed in US Patent 4,194,892 to Jones, et al., is a rapid pressure swing adsorption (RPSA) system, which utilizes a single vessel filled with small adsorbent particles as well as very short cycle times (as short as a few seconds). It is worth noting that US Patent 4,194,892's primary purpose is not to reduce void space, but instead to reduce cycle time and adsorbent inventory and to eliminate multiple vessels. However, the use of a single bed can theoretically eliminate the distribution pipes (and then their voids) connecting a compressor or vacuum pump to different vessels in a multiple vessel PSA. The disadvantages of the single bed PSA are: (1) void space in the vessel header is not addressed and (2) product recovery is limited (in comparison to multiple vessel PSA) without an additional storage tank and recycle component.

US Patent 4,354,859 to Keller, et al. teaches a pressure swing parametric pumping process. This system, called a piston-driven PSA system, uses two synchronized pistons to pressurize and depressurize a single adsorber that is fed near the center of the adsorbent bed. Farooq, et al., Separation and Purification Technology 13 (1998) 181, applied this approach to a parallel passage adsorber for nitrogen and carbon dioxide separation. Suzuki, et al., Adsorption 2 (1996) 111 also utilized this approach in a single piston system for oxygen enrichment from air. This approach can theoretically eliminate header void spaces associated with conventional PSA systems. Moreover, there is no need for valves because flows can be controlled by the piston movement. However, the

piston-driven PSA system suffers from scale-up difficulties. For instance, a very large piston is normally required for a large production unit. A piston of this size would be difficult to manufacture.

5 Also, like the single bed PSA, the piston driven PSA suffers from low recovery in comparison to a conventional multiple vessel PSA.

Illustratively, European Patent Application 0,879,630 A2 to Garrett and La Cava extends the piston-

10 driven PSA concept to a system with two sets of pistons or diaphragms. A first set of pistons or diaphragms is located at the top and bottom of the bed to influence fluid flow, as well as a second set of pistons or diaphragms at the side walls of the adsorber. The

15 second set fractionally increases and decreases bed pressure prior to the adsorption and desorption steps, respectively. The Garrett and La Cava patent application teaches that using two sets is more efficient than only using one set. Nonetheless, as

20 acknowledged by Garrett and LaCava, its recovery is low. In addition, the second set of pistons or diaphragms complicates the process.

The present invention addresses the limitations of conventional vessel designs, single vessel PSA, and

25 piston-driven PSA systems. The present invention not only minimizes the header void spaces within each vessel, but also improves distribution pipe void spaces between the compressor/vacuum pump and each vessel. Moreover, the present invention can use multiple

30 compressors and/or vacuum pumps to better distribute flow and further reduce the void spaces.

Summary of the Invention

The present invention provides a novel PSA system and process with low void volume (also called "void spaces") and improved flow distribution that is
5 adequate for fast cycle processes. This system can also be adapted for use in combined piston-driven and conventional multi-bed PSA systems as well as in bed-to-bed interactions.

In one embodiment of the present invention, a low
10 pressure swing adsorption system is taught wherein flow movement and pressure pulse are influenced from the same pressure source. The pressure source may be a high pressure source or a low pressure sink. The system includes at least one vessel containing an
15 adsorbent bed. An inlet (feed end) is coupled to the vessel by way of an inlet header and an outlet (production end) is coupled to the vessel by way of an outlet header. The inlet header and the outlet header of each vessel have a combined volume of less than
20 approximately 20% of the volume of the adsorbent bed. Preferably, this volume is limited to less than 10% and most preferably to less than 5%. Each inlet is coupled to a high pressure source or a low pressure sink. This configuration is depicted in Figure 2a and 2b,
25 discussed in detail below. It is notable that void volumes of less than about 20% of the adsorbent bed can be achieved in nearly all bed configurations except radial bed configurations. One skilled in the art would acknowledge that void volumes this low are not
30 readily realized in radial bed configurations. For radial beds, the present invention can achieve void volumes of less than 50%.

In a second embodiment, depicted in Figure 2c, each vessel has an adsorbent bed with an inlet header and an outlet header. Each vessel has at least one outlet and more than one inlet. Mounted proximate to each inlet is a high pressure source or a low pressure sink. As in the first embodiment, the total volume of the inlet and outlet headers of each vessel is limited to less than approximately 20% of the volume of the adsorbent bed of that vessel. More preferably, this volume is less than 10% and most preferably less than 5%.

In a third and most preferred embodiment, as depicted in Figure 2d, each vessel has an adsorbent bed, an outlet header and an inlet header. Further, each vessel has at least one outlet and more than one inlet. Each inlet is coupled to a valve mounted proximate to said vessel. All valves share a common high pressure source and/or low pressure sink. Again, the total volume of the inlet and outlet headers of each vessel is limited to less than approximately 20% of the volume of the adsorbent bed of that vessel. More preferably, this volume is less than 10% and most preferably less than 5%. To increase the efficiency of this embodiment distribution pipes connecting in the inlet valves to the high pressure source or low pressure sink should be maintained at high or low pressures, respectively. The total volume of the distribution pipes may also be limited to less than approximately 10% of the total volume of the adsorbent bed(s).

All void volume situated between the inlet and pressure source may be collectively referred to as feed

end intermediary volume. This feed end intermediary volume is depicted in the figures as S1, S1', V5, V5' and V4. While silencers are depicted in the figures, the void source may be any system components and their associated volumes situated between the inlet and the pressure source and subjected to pressure changes. Thus, the term "intermediary volume" may include pipes, silencers, tanks, or any other void source that happens to be located in this area. In accordance with the present invention, this intermediary void volume may be limited to less than 15-20% of the total volume of the adsorbent bed(s).

The adsorbent bed(s) may be configured radially, vertically or, most preferably, configured as a flat header bed. In addition, the high pressure source may be of any type known to those skilled in the art; however, a compressor is preferable, such as a conventional Roots type compressor or a linear compressor (i.e., a piston compressor driven by a linear motor). The present invention may be employed wherein the piston compressor is comprised of more than one piston.

A low pressure sink may be used in conjunction with, or as an alternative to, the high pressure source described above. Any low pressure sink may be employed in the system of the present invention; however, a vacuum pump is preferred.

One object of the present invention is to reduce the void volume in both the feed end (inlet) and the production end (outlet) for fast PSA processes with reduced cycle time. A further object of the present invention is to provide a system with improved product

gas production and improved adsorbent utilization. Another object of the present invention is to provide a system with reduced intermediary volume relative to the adsorbent bed(s) volume. Yet a further object is to

5 present an efficient low void adsorption system that can be readily adaptable to single or multiple bed configurations as well as various bed configurations. Other features and advantages of the present invention will be apparent from the following detailed

10 description and when read in conjunction with the accompanying drawings.

Brief Description of the Drawings

Figure 1 is a schematic depicting a conventional

15 PSA.

Figure 2a is a schematic depicting a single bed system with low void space. This schematic shows a single bed with a high pressure source and a low pressure sink coupled to said bed.

20 Figure 2b is a schematic depicting a two bed system with low void space.

Figure 2c is a schematic depicting a flat header bed with closely mounted compressors and/or vacuum pumps.

25 Figure 2d is a schematic depicting a flat header bed in which inlet valves are mounted proximate to the inlet header. These inlet valves share a common high pressure source or low pressure sink.

Figure 3 is a schematic depicting a radial bed.

30 Figure 3a is a top view of this radial bed while Figure 3b is a side view of the radial bed.

Figure 4 is a schematic depicting the top view of a segmented vertical bed, different sections are separated by dividers which undergo different PSA process steps such as adsorption, desorption, and equalization, etc.

Figure 5 is a schematic depicting a vertical plate bed.

Figure 6 is a schematic depicting a representative process cycle.

Figure 7 is a graph depicting the void influence on recovery and power. Case A is the prior art (as shown in Figure 1) but with a fast cycle time (approximately 2 seconds), low recovery and high power. Case B is the present invention with a reduced distribution pipe void volume as shown in Figure 2b. Case C is the present invention with a flat header as shown in Figure 2d. The two-bed system has a high pressure equal to 1.5 bars and a low pressure equal to 0.3 bars, an O₂ purity equal to 90% and a cycle time equal to approximately 1 to 2 seconds.

Detailed Description of the Invention

The present invention provides a pressure swing adsorption (PSA) system with a low void volume and enhanced process performance in which the void space in the inlet and outlet headers, the feed and vacuum distribution pipes and silencers is limited. In the disclosed embodiments, pressure sources, such as high pressure sources and/or low pressure sinks, are mounted proximate to, or nearly proximate to, the vessels. The present invention may suitably employ multiple inlets

and/or multiple outlets to improve flow distribution and further decrease void volume.

Throughout this document, the terms "inlet" and "feed end" are used interchangeably and are intended to carry essentially the same meaning. Likewise, the terms "outlet" and "production end" are used interchangeably and are intended to carry essentially the same meaning.

Besides enhanced adsorption, the present invention results in a system with fast cycle times as compared with conventional PSA system performance. Using short cycles times may reduce adsorbent inventory, make PSA systems more compact, and increase productivity. This feature is especially important for medical applications such as oxygen concentrators. Therefore, decreasing cycle time has become a central point in PSA development. The present invention reduces the conventional 30 second cycle time by an order of magnitude.

The present invention has at least four advantages in low void volume, flow distribution and process performance as compared with the systems taught in the prior art. First, those skilled in the art understand that distribution pipes (also called feed distribution pipes and vacuum distribution pipes) connecting high pressure sources and/or low pressure sinks to the vessel contribute to total void space, thereby reducing the efficiency of the system. The present invention discloses that these high pressure sources and/or low pressure sinks can be mounted proximate to, or nearly proximate to, the vessels, thereby eliminating the need for these feed and vacuum distribution pipes and their

associated volume. Likewise, silencers contribute to total void space and may be reduced or eliminated as disclosed in the present invention to reduce void space and improve system efficiency. On this basis,
5 significant void volume reduction and process performance improvement are achieved in comparison with a conventional multi-bed PSA.

Second, more than one high pressure source and/or low pressure sink may be mounted proximate to, a nearly
10 proximate to, each vessel, by suitably employing multiple inlets and/or outlets. These inlets and outlets improve flow distribution within the adsorbent bed headers and reduce header void space. For example, the ratio of the volume of the void space to the volume
15 of the adsorbent bed is minimized. The resultant system has a reduced total void space as compared with the PSA systems taught in the prior art.

Third, the configuration taught herein removes the scale-up difficulties associated with Suzuki, et al.'s
20 piston-driven system. Under the present invention, a series of smaller pistons may be suitably employed to replace one large piston, by using the multiple feeds.

Fourth, multi-beds and bed-to-bed interactions may be suitably employed to improve overall performance.

25 Figure 1 represents a PSA system equivalent to that taught in the prior art. These systems tend to have large distribution pipe volumes, large header volumes and large cycle times (approximately 30 seconds). A configuration with two vertical vessels
30 and 10' each with an adsorbent bed 11 and 11' with volumes V_1 and V_1' , respectively, is chosen for illustration purposes only and is intended to be a non-

limiting representative example. The configuration of Figure 1 also includes inlets 13 and 13' connected to the adsorbent bed by way of inlet headers 12 and 12', outlets 15 and 15' connected to the adsorbent beds by way of outlet headers 14 and 14', a low pressure sink 17, and a high pressure source 19. Inlet headers 12 and 12' have volumes V_2 and V_2' , respectively. Outlet headers 14 and 14' have volumes V_3 and V_3' . A conventional system typically consists of the following void spaces:

- 1) Headers - Inlet headers 12 and 12' and outlet headers 14 and 14' represent void space. In the case of a conventional vertical adsorbent bed configuration, the inlet and outlet headers comprise a void space equivalent to approximately 16 to 20% of the volume of the adsorbent bed. In the case of radial beds, the inlet and outlet headers have a void space equivalent to approximately 20 to 60% of the volume of the adsorbent bed.
- 2) Distribution Pipes - Distribution pipes D1, D2, D3 and D4 connect the high pressure source to the adsorbent beds (feed distribution pipes) and connect the low pressure sink to the adsorbent beds (vacuum distribution pipes), collectively referred to as "feed end pipe volume." Total volume of the feed end (inlet) pipes equals V_4 . Distribution pipe D7 connects the production tanks to the adsorbent bed. The volume of the production end (outlet) distribution pipes D7 is referred to collectively as V_7 . These pipes represent void space of approximately equal to 5 to 10% of the volume of the adsorbent bed.

3) Silencer - Silencer S1 with volume V5, such as a tank positioned between the high pressure source or low pressure sink and the adsorbent bed, also represents void space. Further, such tanks S2 with
 5 volume V8 may be situated on the production end. Typically, these silencers have a void space equivalent to approximately 5 to 10% of the volume of the adsorbent bed.

The total void space volume is the sum of these
 10 three void spaces. There is a large amount of irreversible work present in these void spaces due to pressure changes in the PSA process, representing a significant loss of power and process performance. This power loss increases with an increase in the ratio
 15 of high to low pressure.

Further, product gases remained trapped in these voids upon saturation of the adsorbent bed and are lost during regeneration of the adsorbent bed. Therefore, larger void spaces represent lost product.

20 In accordance with the present invention, systems within the following void space parameters may be developed by mounting high pressure sources and/or low pressure sinks proximate to, or nearly proximate to, the adsorbent bed typically in-line with fluid flow
 25 through the adsorbent bed so that pressure pulse and flow movement are influenced from the same pressure source.

$$20\% \geq \frac{\text{volume of the inlet headers (V2+V2')} + \text{volume of the outlet headers (V3+V3')}}{\text{volume of the adsorbent beds (V1+V1')}} \\
 30$$

$$10\% \geq \frac{\text{volume of the distribution pipes (V4 + V7)}}{\text{volume of the adsorbent beds (V1+V1')}} \\
 30$$

volume of the adsorbent beds ($V_1 + V_1'$)

$$10\% \geq \frac{\text{volume of the silencers } (V_5 + V_5' + V_8)}{\text{volume of the adsorbent beds } (V_1 + V_1')}$$

5

The present invention also discloses that the total void space of silencers, tanks, pipes and other various sources of void space located between the inlet and the pressure sources may likewise be limited to about 20% of the adsorbent volume.

10

Note that in the case of radial bed configurations, header void space tends to be generally larger. Therefore, for radial beds, equation (1) is modified to:

15

$$50\% \geq \frac{\text{volume of the inlet headers } (V_2 + V_2') + \text{volume of the outlet headers } (V_3 + V_3')}{\text{volume of the adsorbent beds } (V_1 + V_1')}$$

20

Mounting the high pressure source and low pressure sink proximate to, or nearly proximate to, the vessel allows for less distribution pipe volumes, thereby reducing total void space.

In conventional systems, bed fluidization, pressure drop, and compressor capacity typically limit flow rate. One conventional method to increase productivity includes reducing the bed length and increasing the cross-sectional area of the bed. However, shorter bed lengths and larger bed diameters often result in a higher ratio of the void volume relative to the adsorbent bed volume. For instance, the total void volume ratio of a conventional axial-bed PSA system is about 30%, and the process cycle time is about 30 seconds. Reduction of the cycle time by 50%

30

(i.e., from 30 seconds to 15 seconds) by cutting the bed length by 50%, approximately doubles the total void volume ratio (i.e., from 30% to 60%) since the inlet (feed end) and outlet (production end) void volumes remain the same. The increased void volume ratio dramatically decreases the process performance. Therefore, the void volume reduction is a key for fast PSA system developments.

Figure 2a illustrates one non-limiting embodiment of the present invention using a single vertical bed. A vessel 20 has an adsorbent bed 21 (with volume V1) with an inlet 23 coupled thereto by way of an inlet header 22 (with volume V2). The inlet 23 draws feed gases or feed gas mixtures to the adsorbent bed 21 for purification or other treatment. Likewise, an outlet 25 is coupled to said adsorbent bed 21 by way of an outlet header 24 (with volume V3). The outlet 25 provides processed gases also called product gases. Connected to each vessel via the inlet header is a high pressure source 27 or low pressure sink 29. These sources 27 or sinks 29 may be coupled to the vessel 20 in a variety of ways; however, Figure 2a depicts valves 30 and 31 coupling the sources 27 or sinks 29 to the vessel 20. Although Figure 2a depicts both a high pressure source 27 and a low pressure sink 29, these sources and sinks may be used in the alternative or in concert.

The vessel is typically filled with an adsorbent suitable to the product desired, such as a nitrogen selective adsorbent that produces an oxygen product. The high pressure source may be any type of compressor, such as a conventional Roots type or linear compressor.

The linear compressor is a piston compressor driven by a linear motor. These types of linear compressors have a higher efficiency and improved performance. In addition, it is easy to modulate capacity or flow with piston compressors; such a feature is very useful in medical concentrators. Furthermore, linear compressors may be modified to operate as a vacuum pump. The low pressure sink may be of any configuration, suitable to the system, however, a vacuum pump is preferred. The high pressure source and low pressure sink may be used in the alternative or in concert.

Figure 2b depicts a two-bed embodiment of the present invention. This embodiment contains two vessels 20 and 20' each with an adsorbent bed 21 and 21' (with volumes V1 and V1', respectively), an inlet header 22 and 22' (with volumes V2 and V2', respectively), an inlet 23 and 23', an outlet header 24 and 24' (with volumes V3 and V3', respectively), an outlet 25 and 25', and either a high pressure source 27 and 27' or a low pressure sink 29 and 29'. The high pressure source and low pressure sink may be used in the alternative or in concert. Note that pipe D5 (with volume V4) and valve 32 are used for inlet-inlet equalization between the two vessels, if necessary. Distribution pipe D7 on the production (outlet) end of the system has volume V7. Any combination or mixture of high pressure source(s) or low pressure sink(s) are acceptable. Further, although two beds/vessels are shown, any number of beds/vessels may be suitably employed.

Also depicted in Figure 2b are silencers S1, S1', and S2 having volumes V5, V5', and V8, respectively.

These silencers are intended to represent all void sources, such as silencers, tanks, pipes, etc., situated between the inlet and the pressure source. Those skilled in the art would recognize that various void sources, not solely silencers, may be situated in the system. These silencer volumes V5, V5', and V8, distribution pipe volumes V4 and V7, and other void volume sources V6 (not shown) are collectively referred to as intermediary volumes V10 (not shown) and may be limited in accordance with the present invention. These volumes may be limited to less than approximately 15-20% of the total adsorbent bed volume.

Figure 2c shows yet another non-limiting embodiment of the present invention using a flat header bed with closely mounted compressors and/or vacuum pumps. In this embodiment the high pressure source(s) 27 and low pressure sink(s) 29 are mounted immediately proximate to the inlet header 22 of the adsorbent bed 21. In such a configuration, at least one outlet 25 is coupled to the outlet header 24 of vessel 20.

Since the separation work in a PSA process is only done in the adsorbent, the rest of the void (i.e., non-adsorbent) volumes, such as distribution pipes and absorber headers, must be minimized for improved process performance. In conventional bed headers, a single inlet or outlet is normally used. A certain volume is needed for distributing gas flows from the inlet or outlet uniformly to the adsorbent for better use of the adsorbent and process performance. Multiple inlets or outlets can provide a better flow distribution and require less header volume. The number of inlets or outlets depends on a number of

factors, for example, product flow, diameter/size of the bed, high pressure source/low pressure sink capacity, etc. If enough inlets or outlets are provided, the flow distribution header volume could be virtually eliminated and a quasi-flat header could be obtained as illustrated in Figure 2c. Compared with a conventional header, the flat header design can save up to 15-20% (and in some instances 5-10%) of the volume of a vertical bed configuration of a 150 TDP oxygen plant, and approximately 20-60% (and in some instances 10-20%) for a radial bed.

Figure 2d shows a further non-limiting embodiment of the present invention using two flat header adsorbent beds 21 and 21' (with volumes V1 and V1', respectively) are connected to to a common high pressure source 27 (i.e., compressor) and/or low pressure sink 29 (for example, a vacuum pump) by way of distributed valves. Valves 36, 36', 37 and 37' represent inlets and may be mounted immediately proximate to the inlet headers 22 and 22' (with volumes V2 and V2', respectively). Likewise, valves 33 and 33' represent outlets and may be coupled proximate to the outlet headers 24 and 24' (with volumes V3 and V3', respectively). Valves 36 and 36' are connected to common distribution pipes D6 and share a low pressure sink 29. Valves 37 and 37' are connected to common distribution pipes and share a high pressure source 27. As in the embodiment of Figure 2d, ideally the distribution pipes D5 and D6 should be maintained at either high pressure or low pressure depending on whether they are connecting the high pressure source or low pressure sink, respectively, to the vessel. The

valves can provide the multiple flow inlets and outlets required by a flat header, thereby reducing the header void volume. Three-way unloading valves (38 and 39) and distributed valves can be suitably employed to

5 close the distribution pipes to pressure changes, for example during an idle step, and maintain either high or low pressure. Therefore, the distribution pipe volume (V4 and V7) does not contribute, or contributes little to, power loss and the total void volume. In

10 this embodiment, one high pressure source and/or one low pressure sink may be sufficient for the entire system. Alternatively, multiple high pressure sources and/or low pressure sink may be employed.

Figure 2d also depicts silencers S1, S1', and S2

15 with volumes V5, V5', and V8, respectively. These silencers contribute to intermediary volume V10 (not shown) along with distribution pipe volumes V4 and V7, and other miscellaneous volumes V6 (not shown). As discussed above, V6 includes all volumes and not solely

20 silencers, that may be situated between the inlet and the pressure source(s) or on the production (outlet) end. In accordance with the present invention, these void sources may be limited to less than 20-15% of the total volume of the total adsorbent bed volume.

25 Figures 3a and 3b depict a radial bed configuration also suitable in the present invention. Figure 3a depicts a top view of the bed and Figure 3b depicts a side view. Figure 3b shows a radial configuration where the high pressure source and/or low pressure

30 sink, and valves are distributed along the circumference of the bed. In addition, the bed may be segmented (or divided, structured) as shown in Figure

4. Figure 4 depicts a segmented vertical adsorber configuration, wherein each segment functions as an individual adsorbent bed. Moreover, the beds may be very shallow and arranged in a parallel configuration where two adjacent beds (or compartments) share a common feed, evacuation and product withdrawal. The system can also be a vertical bed as shown in Figure 5.

Any process cycle with basic adsorption and desorption steps may suitably employ the configurations disclosed herein to improve void volume and efficiency. A representative PSA cycle using two adsorbers is selected for illustrative purposes, as shown in Figure 6. The cycle consists of the following steps:

- 15 Simultaneous feed and product pressurization (FP/PP)
- Adsorption and purge (AD/PG)
- Both end equalization (EQ)
- Evacuation (EV)
- Evacuation and purge (EV)
- 20 Equalization (EQ/FP)

Three overlapping steps are used in this cycle: simultaneous feed and product (FP/PP), dual end equalization (EQ), and simultaneous dual end equalization and feed. These overlapping steps create a continuous feed thereby reducing cycle time. During step 1 (FP/PP) shown in the process cycle of Figure 6 and as shown in the two-bed system of Figure 2b, air containing oxygen and nitrogen is compressed and sent to bed 21 through valve 30. At the same time, high pressure oxygen product is concurrently introduced to bed 21 through valves 33, 34, and 35. When the pressure in the bed reaches adsorption level, step 2

- 22 -

(AD/PG) starts. One portion of oxygen starts flowing from bed 21 through valves 33, 34 and 35 and collected as product. During all these times, bed 21' undergoes two evacuation steps (steps 4 and 5, EV) through valve 31'. When oxygen concentration leaving bed 21 is no longer acceptable, valve 34 is closed. Valve 31' is also closed while valves 30' and 32 are open and step 3 (EQ) starts for bed 21, while bed 21' undergoes step 6 (EQ/FP). When the pressures between the two beds are approximately equal, equalization steps (EQ and EQ/FP) are stopped and the second half of the cycle takes place wherein the steps are repeated. For example, bed 21' processes the air while bed 21 recharges, during which time valve 33' performs the same functions earlier performed by valve 33, valve 30' performs the same functions earlier performed by valve 30, and valve 31' performs the same functions earlier performed by valve 31.

The improvement in process performance as a result of the reduced void volume is illustrated in Figure 7. A simple air separation process with different void volumes is simulated for this purpose. A highly exchanged LiX zeolite ($\text{SiO}_2/\text{Al}_2\text{O}_3$ ratio of between about 2.0 to 2.5) is chosen for adsorbent. The adsorbent particle size is kept constant for this comparison. The operating pressure ratio (adsorption/desorption) is about 5. The process performance is based on oxygen recovery wherein oxygen product purity is maintained at about 90%. The oxygen recovery is defined by the ratio of the oxygen in the product over the oxygen in the feed.

Figure 7 illustrates the influence of the void volume on the performance of fast cycle processes. Given, for example, a conventional axial-bed PSA system (such as that shown in Figure 1) with a cycle time of about 10 seconds and a void volume of about 14%. In order to reduce cycle time to 2 seconds, the bed length must be reduced to one-fifth of its original size. Such a reduction in bed length corresponds to a void volume increase of about 70%. With such a large void volume, oxygen recovery will decrease to about 20%, as indicated by case A of Figure 7. Therefore, a conventional bed configuration cannot achieve fast cycle times without greatly compromising product recovery.

By contrast, using the configuration disclosed in the present invention, the distribution pipes can be avoided as in Figure 2b, resulting in a reduction of the void volume to about 50%. Such a reduction increases recovery to about 25%, as indicated by case B in Figure 7. Furthermore, in the present invention, if two flat headers are used as shown in Figures 2c and 2d, the void volume can be reduced to a few percent of the adsorbent bed, resulting in a recovery of more than 50%, as indicated by case C in Figure 4. Thus, the present invention reduces cycle time while significantly improving recovery.

Similarly, the void volume has a very important effect on power consumption for fast cycle process because large amounts of power are generally lost in the voids. Simulations indicate that as compared with 70% void case A, the present invention can reduce power

by 16% in case B by eliminating the distribution void,
and up to 50% in case C by using flat headers.

It should be understood that the foregoing description
is only illustrative of the invention. Various

5 alternative and modifications can be devised by those
skilled in the art without departing from the
invention. Accordingly, the present invention is
intended to embrace all such alternatives,
modifications and variances which fall within the scope
10 of the appended claims. More particularly, the system,
although presented here with a one or two bed
embodiment, can be practiced with more beds. Further,
the invention is not restricted to a single adsorbent.
Multiple adsorbents can be employed. Also, adsorbents
15 could be layered or mixed within a bed. The adsorbents
should not be limited to nitrogen selective adsorbents
mentioned above, other adsorbents can be employed as
well. Although the process of the present invention is
preferably operated near atmospheric pressures and
20 ambient temperatures, it can be applied to a full range
of process conditions, e.g., pressures, temperature,
and flow rate, etc.

Further, bed-to-bed equalizations or interactions
are not limited to what is described in the present
25 invention. Other arrangements can be used. When the
bed is a segmented one, equalizations can be between
segments. Furthermore, the present invention is not
limited to the embodiments described herein, various
other configurations may be suitable employed. In
30 addition, the linear compressor is not limited to a
piston compressor driven by a linear motor mentioned
above. It can be a compressor driven by any

1. A low void pressure swing adsorption system wherein flow movement and pressure pulse are influenced from the same pressure source comprised of:

(b) wherein the inlet header and the outlet header of each vessel have a combined volume of less than 20% of the volume of the adsorbent bed of said vessel; and,

2. The low void pressure swing adsorption system of Claim 1, wherein the inlet header and the outlet header of each vessel have a combined volume of less than 10% of the volume of the adsorbent bed of said vessel.

4. The low void pressure swing adsorption system of Claim 1, wherein said adsorbent bed is selected from

the group consisting of flat header beds, segmented beds, and vertical beds.

5. The low void pressure swing adsorption system of Claim 1, wherein at least one pressure source is a high pressure source.

6. The low void pressure swing adsorption system of Claim 1, wherein at least one pressure source is a low pressure sink.

7. A low void pressure swing adsorption system wherein flow movement and pressure pulse are influenced from the same pressure source comprised of:

(a) at least one hermetically sealed vessel containing a radial adsorbent bed with more than one inlet coupled to the radial adsorbent bed by way of an inlet header and at least one outlet coupled to the radial adsorbent bed by way of an outlet header;

(b) wherein the inlet header and the outlet header of each vessel have a combined volume of less than 50% of the volume of the radial adsorbent bed of said vessel; and,

(c) wherein at least one pressure source is mounted proximate to each inlet.

8. The low void pressure swing adsorption system of Claim 7, wherein to at least one pressure source is a high pressure source.

9. The low void pressure swing adsorption system of Claim 7, wherein at least one pressure source is a low pressure sink.

10. The low void pressure swing adsorption system of Claim 7, wherein the inlet header and the outlet header of said vessel have a combined volume of less than 20% of the volume of the radial adsorbent bed of each vessel.

11. A low void pressure swing adsorption system wherein flow movement and pressure pulse are influenced from the same pressure source comprised of:

(a) at least one hermetically sealed vessel containing an adsorbent bed with at least one inlet coupled to the adsorbent bed by way of an inlet header and at least one outlet coupled to the adsorbent bed by way of an outlet header;

(b) wherein the inlet header and the outlet header of each vessel have a combined volume of less than 50% of the volume of the adsorbent bed of said vessel;

(c) wherein each inlet has a valve mounted proximate to said vessel; and,

(d) wherein each valve shares a common pressure source.

12. The low void pressure swing adsorption system of Claim 11, wherein said common pressure source is a high pressure source.

13. The low void pressure swing adsorption system of Claim 11, wherein said common pressure source is a low pressure sink.

14. The low pressure swing adsorption system of Claim 11, wherein the inlet header and the outlet header of each vessel have a combined volume of less than 20% of the volume of the adsorbent bed of each vessel.

15. The low void pressure swing adsorption system of Claim 11, wherein said adsorbent bed is selected from the group consisting of flat header beds, segmented beds, vertical beds, and radial beds.

16. The low void pressure swing adsorption system of Claim 11, wherein distribution pipes connect said valves to said high pressure source or said low pressure sink.

17. The low void pressure swing adsorption system of Claim 16, wherein said inlets share a high pressure source mounted to said valve and said distribution pipes are maintained at high pressure.

18. The low void pressure swing adsorption system of Claim 16, wherein said inlets share a low pressure sink mounted to said valve and said distribution pipes are maintained at low pressure.

19. The low void pressure swing adsorption system of Claim 16, said distribution pipes have a total

- 30 -

volume of less than 10% of the total volume of the adsorbent beds.

20. The low void pressure swing adsorption system of Claim 11, wherein intermediary volumes are located between the pressure source and the inlet having a total volume less than 15% of the total volume of the adsorbent beds.

LOW VOID ADSORPTION SYSTEMS AND USES THEREOFAbstract of the Invention

A low void pressure swing adsorption system wherein flow movement and pressure pulse are influenced from the same source comprised of at least one hermetically sealed vessel containing an adsorbent bed with an inlet coupled to the adsorbent bed by way of an inlet header and an outlet coupled to the adsorbent bed by way of an outlet header. Void volume of the inlet and outlet headers can be limited to less than 20% of the adsorbent bed volume, preferably to less than 10%, and most preferably to less than 5%, by mounting high pressure source(s) and/or low pressure sink(s) proximate to, or nearly proximate to, the adsorbent bed/vessel. Low void volumes and reduced cycle times may be achieved in all bed configurations, including flat header beds, segmented beds, and vertical beds. Radial beds may be configured so that the void volume of the inlet and outlet headers is less than 50% of the volume of the radial adsorbent bed, preferably to less than 20%, and most preferably to less than 10%.

	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2433	2434	2435	2436	2437	2438	2439	2440	2441	2442	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

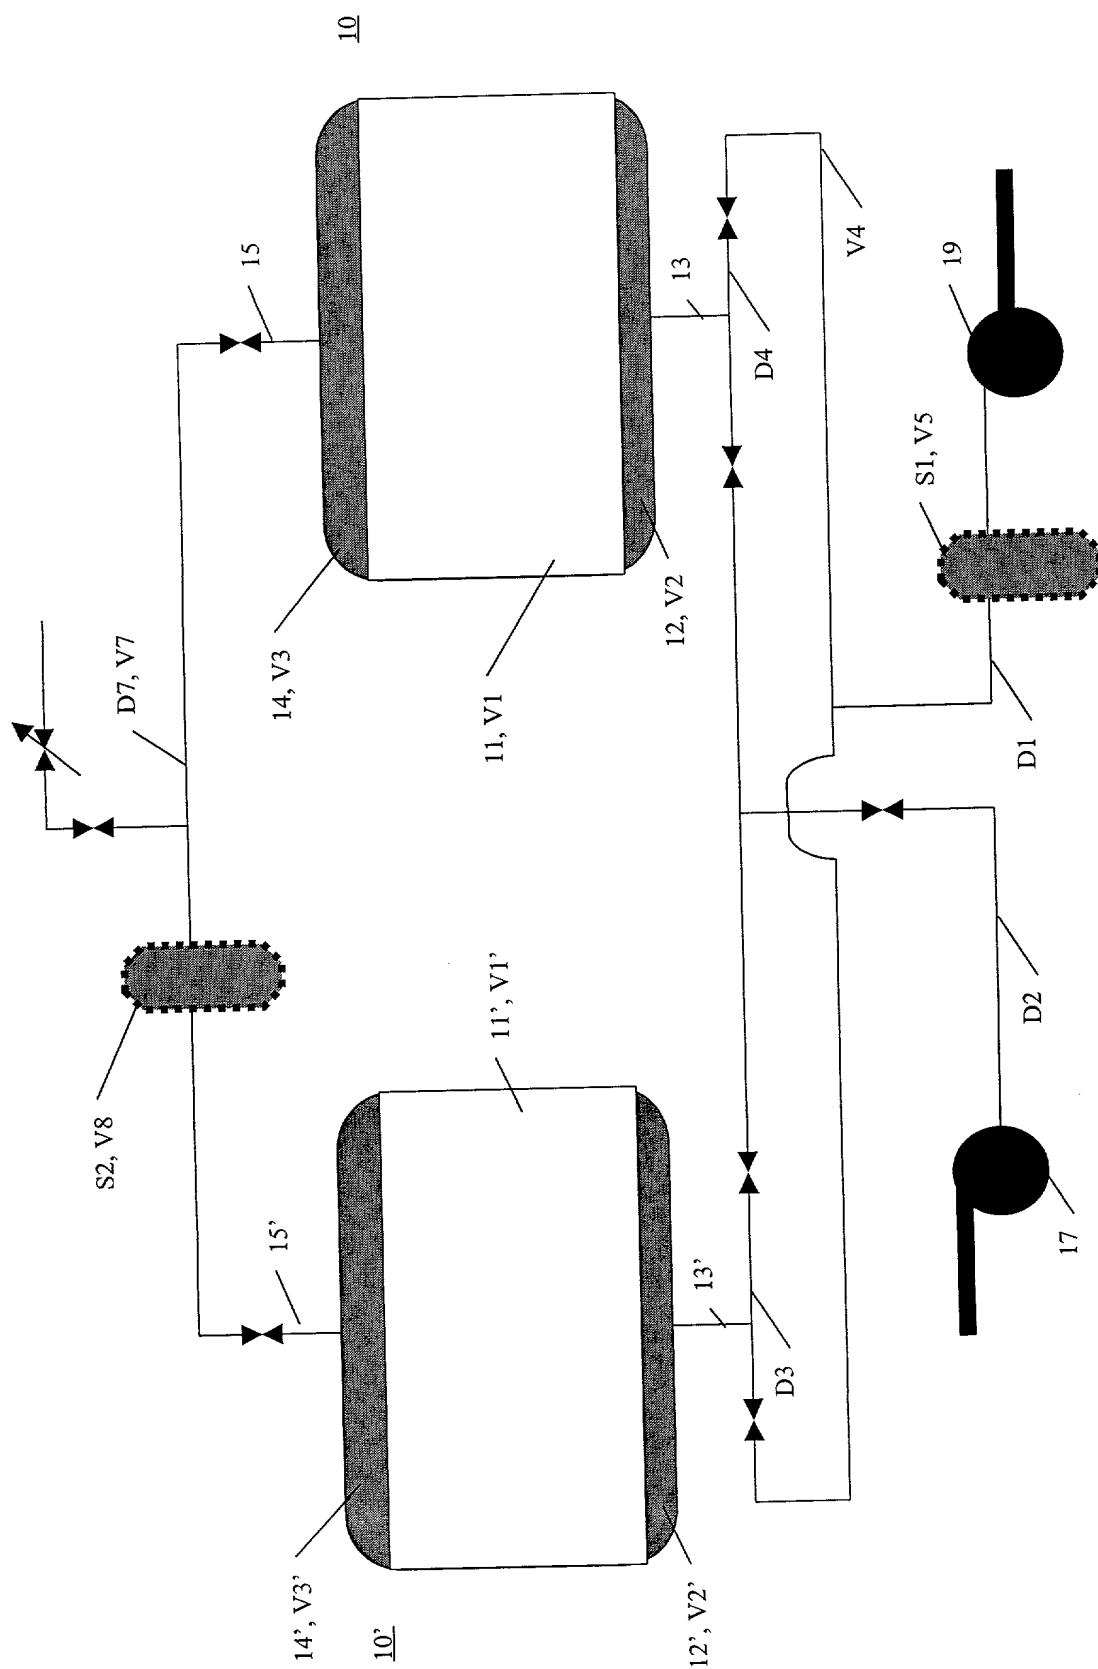


Figure 1. Prior Art: Conventional PSA

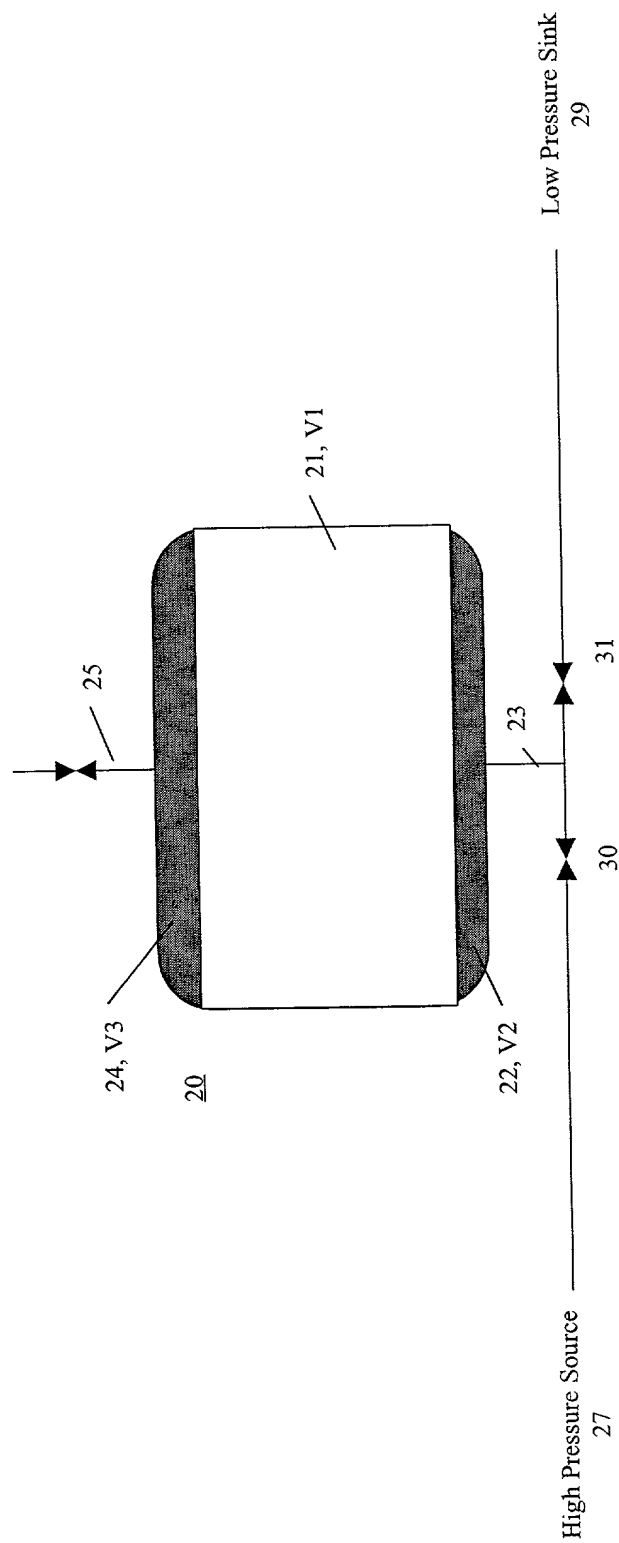


Figure 2a. Invention: Single Bed with Low Void

Year	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100
1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	

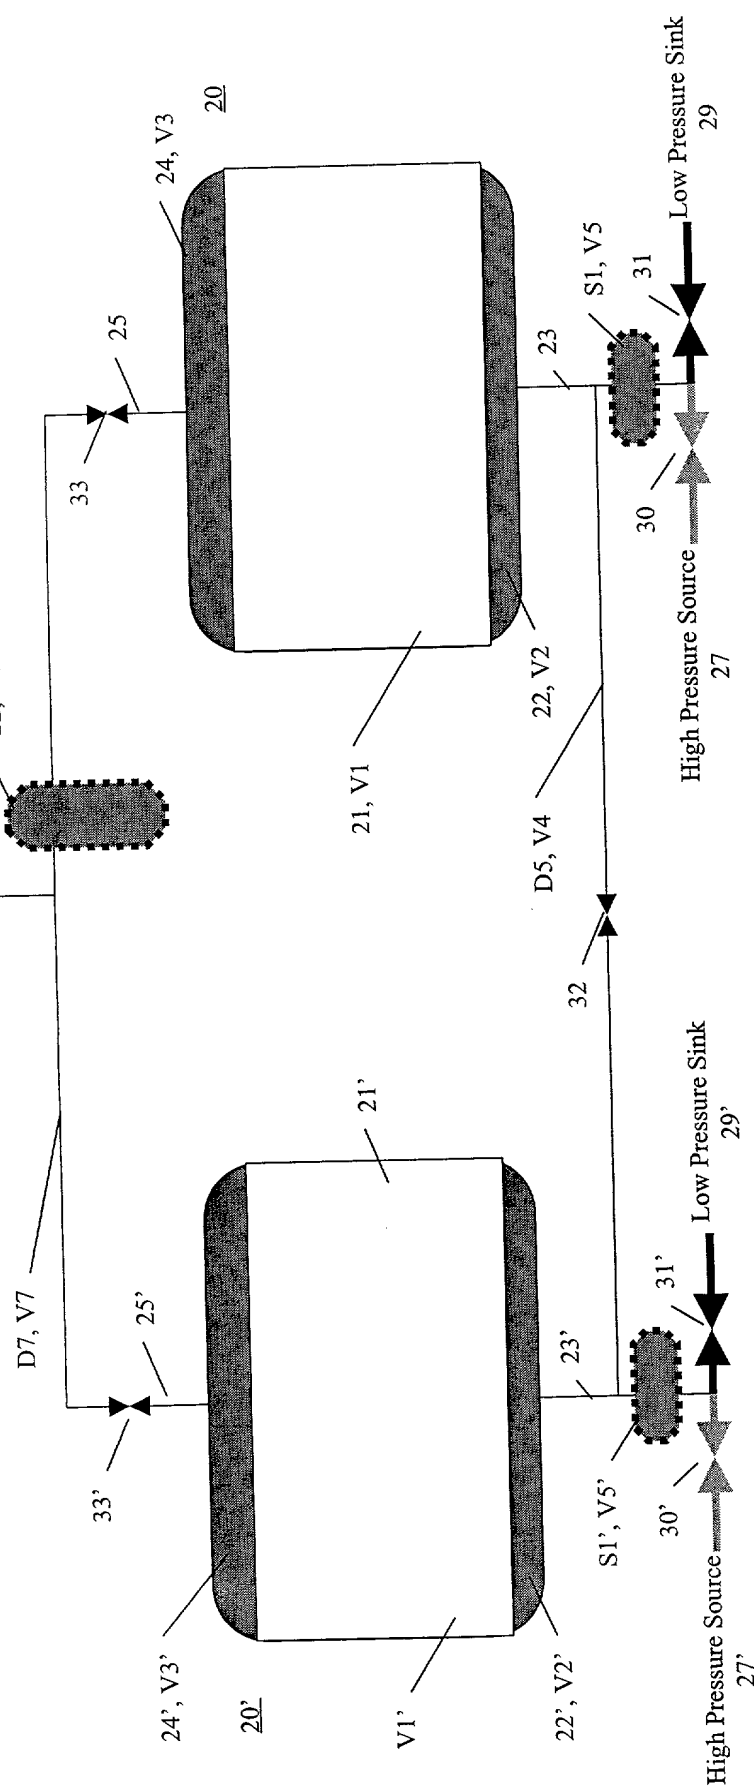


Figure 2b. Invention: Two Bed with Low Void


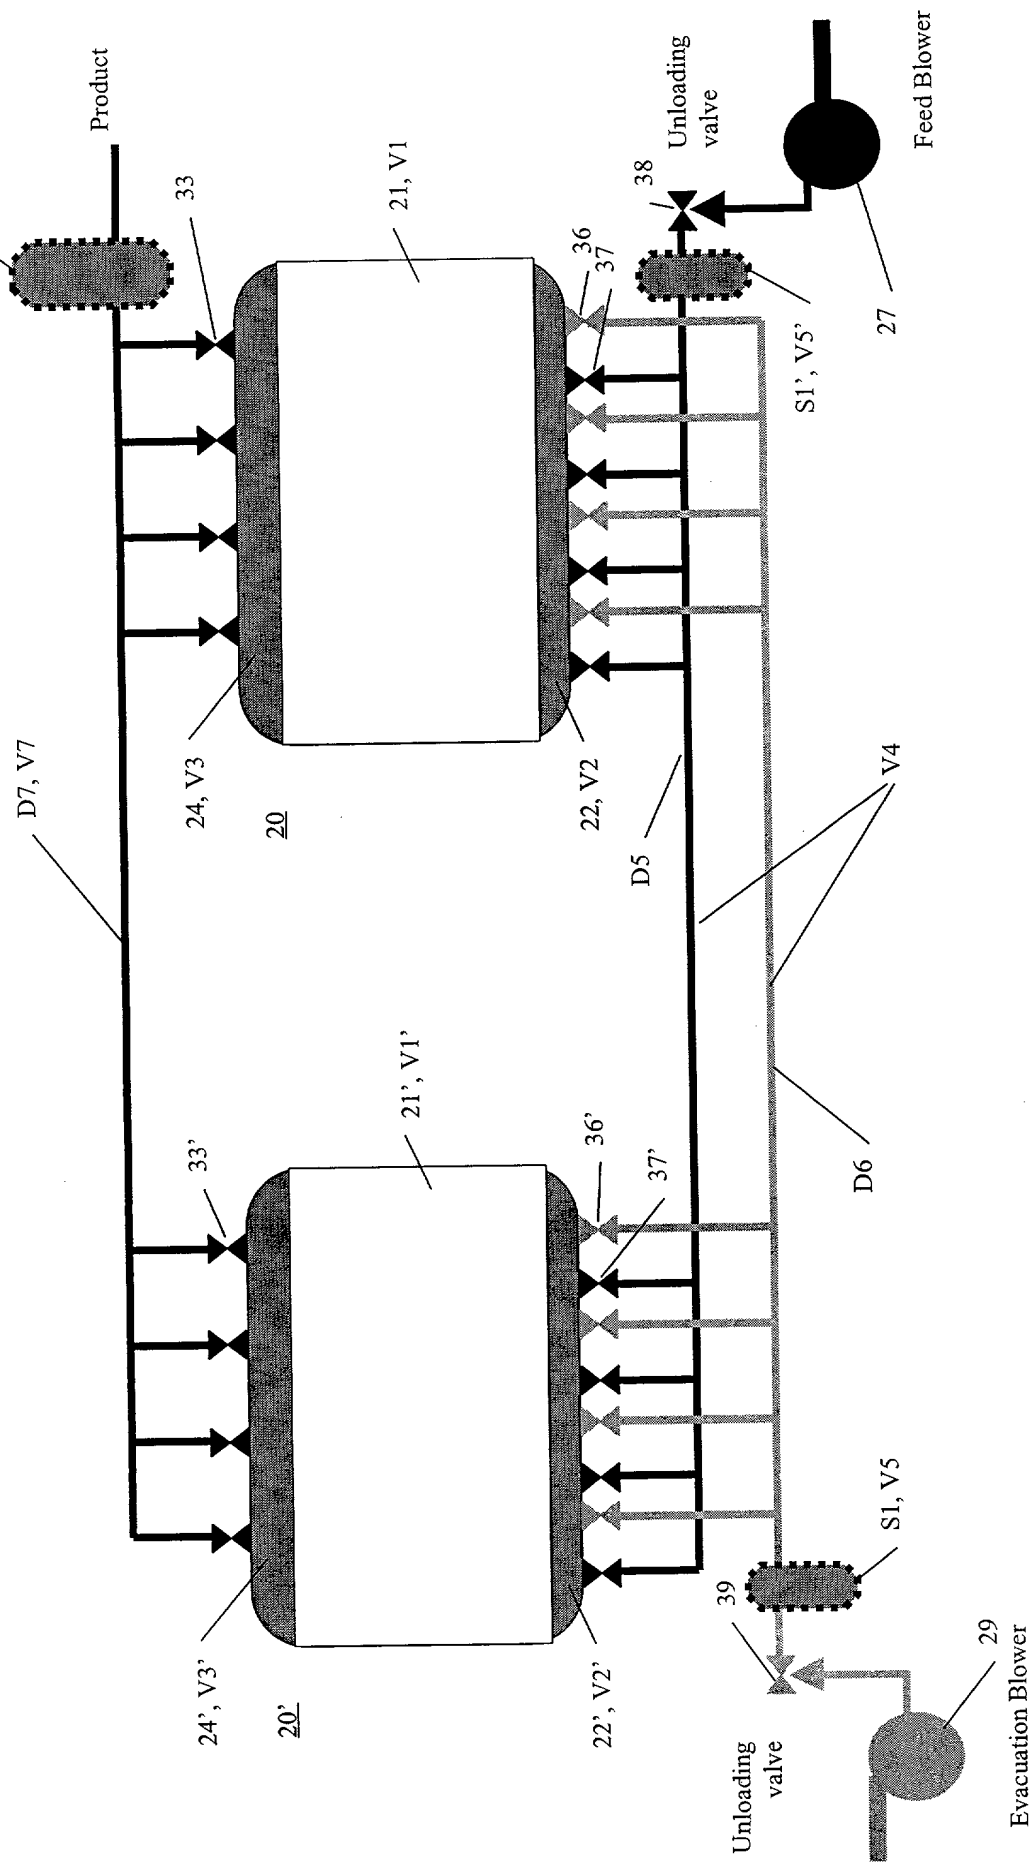


Figure 2d. Invention: Flat Header Bed with Distributed Valves

a) Top View

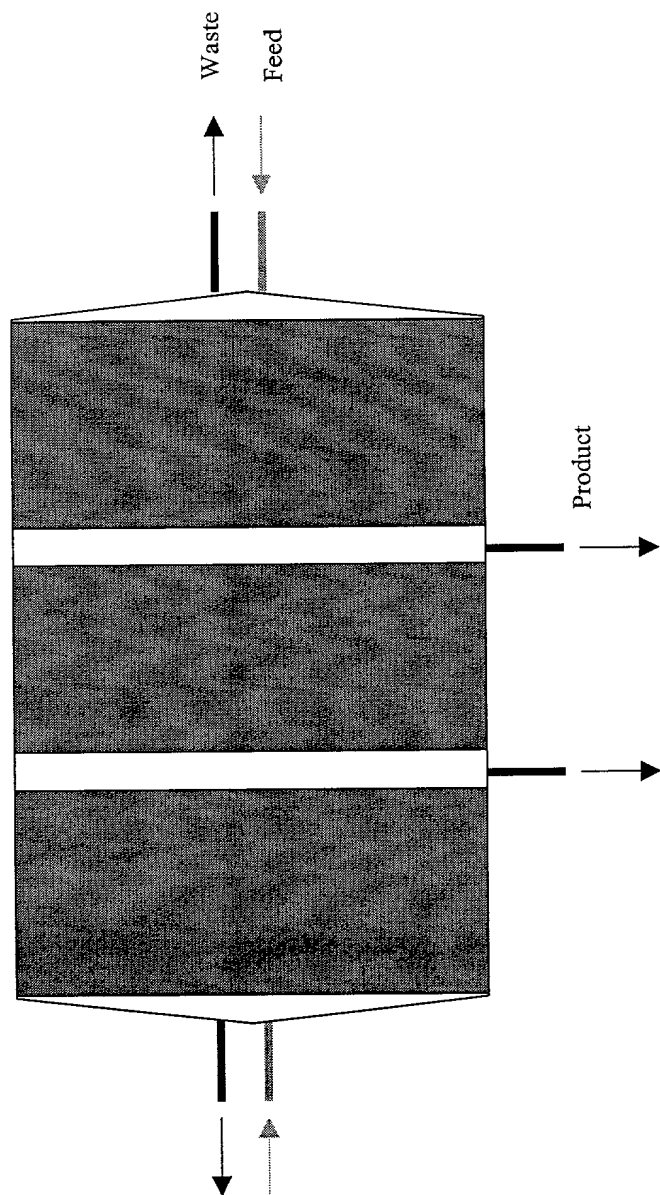

b) Side View

Figure 3. Radial Bed

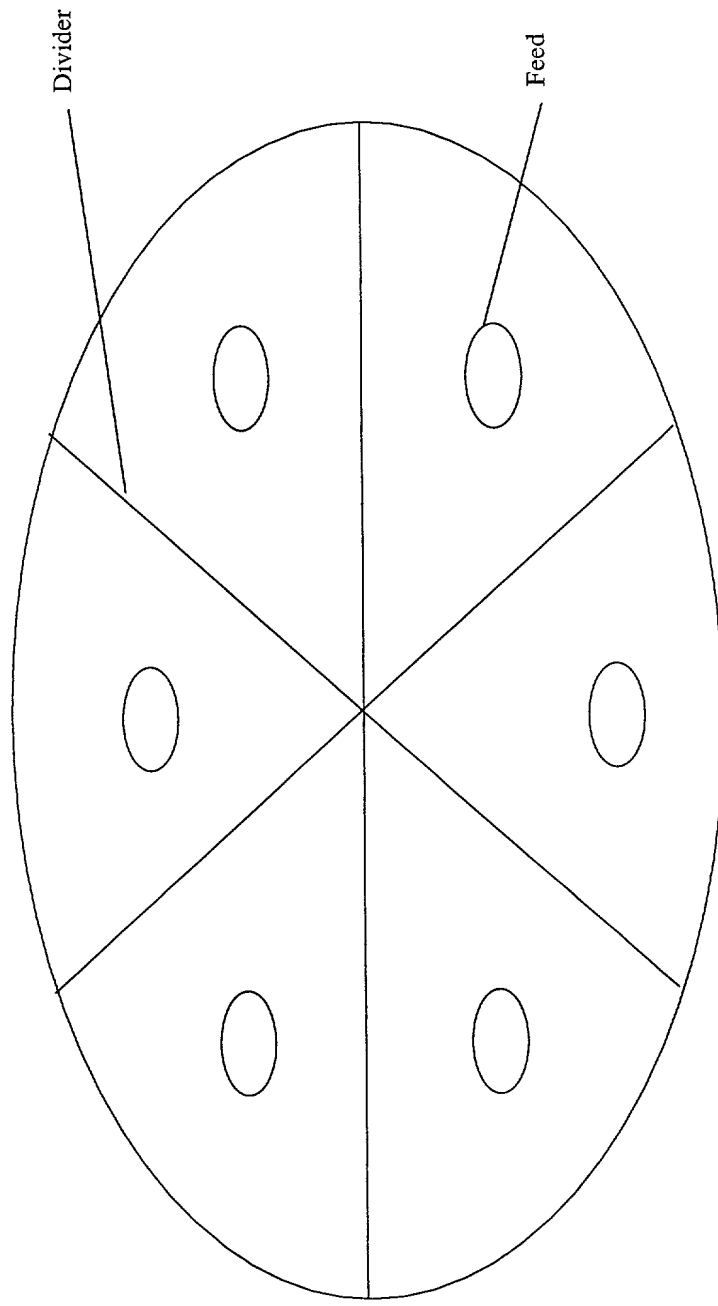


Figure 4. Segmented Bed

Top view of a segmented vertical bed, different sections separated by dividers undergo different PSA process steps such as adsorption, desorption and equalization, etc.

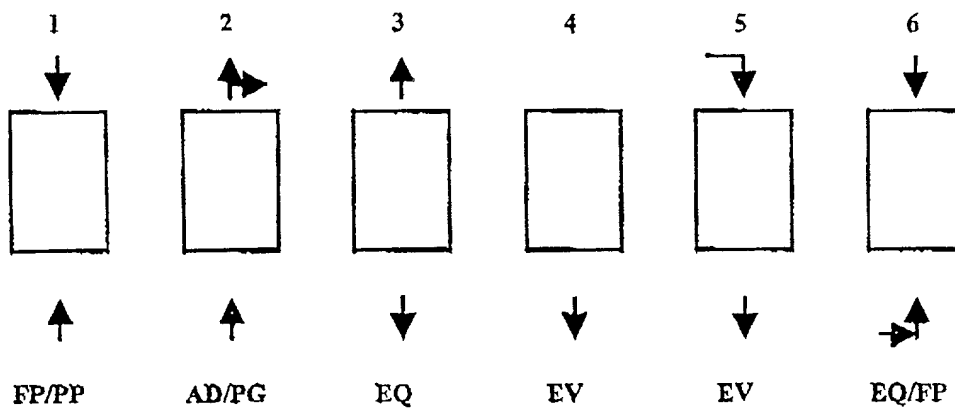


Figure 6 Representative Process Cycle

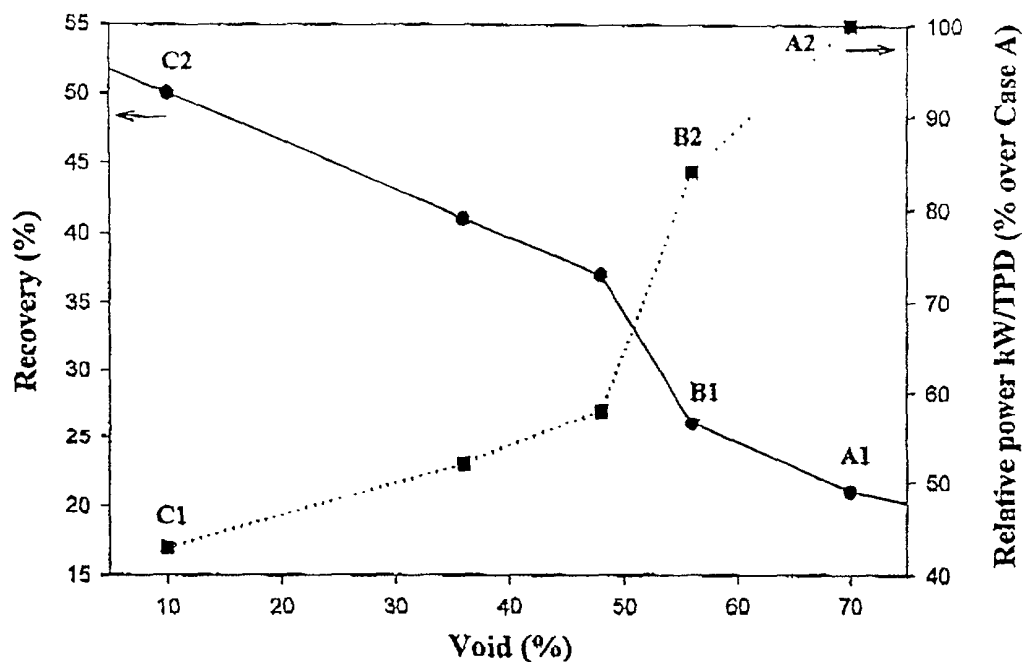


Figure 7 void influence on recovery and power

- Case A: Without the instant invention with large void volume as shown in Figure 1 but with fast cycle time (~2s), low recovery and high power.
- Case B: The instant invention, reduced distribution pipe void volume as shown in Figure 2b.
- Case C: The instant invention, flat header as shown in Figure 2d.

2-Bed system, high and low pressures are 1.5 and 0.3 bars, O₂ purity is 90%, cycle time is about 1~2s.

**DECLARATION
AND POWER OF ATTORNEY
Original Application**

ATTORNEY'S DOCKET NO.
20846

As a below named inventor, I declare that I have reviewed and understand the contents of the specification, including the claims, as amended by any amendment specifically referred to in this Declaration, that the information given herein is true, that I believe that I am the original, first and sole inventor if only one name is listed at 201 below, or a joint inventor if plural inventors are named below at 201 et seq., of the invention entitled:

LOW VOID ADSORPTION SYSTEMS AND USES THEREOF

which is described and claimed in:

- ☒ the attached specification or
☐ the specification in application Serial No. _____ filed _____ amended _____
(for declaration not accompanying application) (Day, Month, Year) (Day, Month, Year)

that I acknowledge a duty to disclose information I am aware of which is material to the patentability of this application in accordance with 37 CFR 1.56(a), that I do not know and do not believe that the same was ever known or used in the United States of America before my or our invention thereof or patented or described in any printed publication in any country before my or our invention thereof, or more than one year prior to this application, or in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months prior to this application and that as to applications for patent or inventor's certificate filed by me or my legal representatives or assigns in any country foreign to the United States of America, the earliest filed foreign application(s) filed within twelve months prior to the filing date of this application and all foreign applications filed more than twelve months prior to the filing date of this application are identified at 600, and, as required, 601 below.

600	CHECK APPROPRIATE BOX:	<input checked="" type="checkbox"/> No earlier-filed applications
	<input type="checkbox"/> Required information as to foreign applications filed prior to filing date of this application is at 601 on page 2 attached hereto and made a part hereof.	

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (List name and registration number)

Blake T. Biederman	Reg. No. 34124	Stanley Ktorides	Reg. No. 29399
Donald T. Black	Reg. No. 27999	Robert J. Follett	Reg. No. 39566
Bernard Lau	Reg. No. 38218	David M. Rosenblum	Reg. No. 29341
Steven T. Trinker	Reg. No. 28274		

SEND CORRESPONDENCE TO: PRAXAIR TECHNOLOGY, INC. Law Department M1-557 39 Old Ridgebury Road Danbury, CT 06810-5113	DIRECT TELEPHONE CALLS TO: Robert J. Follett (203) 837-2363
----------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------

201	FULL NAME OF INVENTOR	LAST NAME NOTARO	FIRST NAME FRANK	MIDDLE NAME	
	RESIDENCE & CITIZENSHIP	CITY Amherst	STATE OR FOREIGN COUNTRY New York		COUNTRY OF CITIZENSHIP U.S.A.
		POST OFFICE ADDRESS 18 Harcroft Court	CITY Amherst	STATE OR COUNTRY N.Y.	ZIP CODE 14226
	202	FULL NAME OF INVENTOR	LAST NAME STEWART	FIRST NAME ALAN	MIDDLE NAME BARNARD
RESIDENCE & CITIZENSHIP		CITY Snyder	STATE OR FOREIGN COUNTRY New York		COUNTRY OF CITIZENSHIP U.S.A.
		POST OFFICE ADDRESS 69 Washington High Way	CITY Snyder	STATE OR COUNTRY N.Y.	ZIP CODE 14226
203		FULL NAME OF INVENTOR	LAST NAME NOWOBILSKI	FIRST NAME JEFFERT	MIDDLE NAME JOHN
	RESIDENCE & CITIZENSHIP	CITY Orchard Park	STATE OR FOREIGN COUNTRY New York		COUNTRY OF CITIZENSHIP U.S.A.
		POST OFFICE ADDRESS 48 Faahs Road	CITY Orchard Park	STATE OR COUNTRY N.Y.	ZIP CODE 14127
	300	<input checked="" type="checkbox"/> Additional matter on page 2 attached hereto and made a part hereof. When page 2 is used, all signatures must be signed on page 2.			
List of Applicants continued on page 2 <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No					

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statement and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application of any patent issuing thereon.

SIGNATURE OF INVENTOR 201	SIGNATURE OF INVENTOR 202	SIGNATURE OF INVENTOR 203
DATE	DATE	DATE

FOR SOLE AND JOINT APPLICATIONS

**DECLARATION
AND POWER OF ATTORNEY**
Original Application
Page 2 (If Required)

ATTORNEY'S DOCKET NO.
20846

601	LISTING OF EARLIEST FOREIGN APPLICATION(S), IF ANY, FILED WITHIN 12 MONTHS PRIOR TO THE U.S. FILING DATE OF THIS APPLICATION. LIST ALL APPLICATIONS FILED ON DATE OF FIRST FILING, IF MORE THAN ONE (1).			
	COUNTRY	APPLICATION NUMBER	DATE OF FILING (DAY, MONTH, YEAR)	PRIORITY OF WHICH IS CLAIMED UNDER 35 USC 119 <input type="checkbox"/> YES <input type="checkbox"/> NO
				<input type="checkbox"/> YES <input type="checkbox"/> NO
				<input type="checkbox"/> YES <input type="checkbox"/> NO
				<input type="checkbox"/> YES <input type="checkbox"/> NO
	Listing of All Foreign Applications Filed, if any, MORE THAN TWELVE MONTHS PRIOR, to U.S. Filing Date of this Application.			
	COUNTRY	APPLICATION NUMBER	DATE OF FILING (DAY, MONTH, YEAR)	

LISTING OF APPLICANTS - continued from Page 1.

204	FULL NAME OF INVENTOR	LAST NAME ZHONG	FIRST NAME GUOMING	MIDDLE NAME
	RESIDENCE & CITIZENSHIP	CITY Getzville	STATE OR FOREIGN COUNTRY New York	COUNTRY OF CITIZENSHIP China
	POST OFFICE ADDRESS	POST OFFICE ADDRESS 107 Deer Ridge	CITY Getzville	STATE OR COUNTRY N.Y.
205	FULL NAME OF INVENTOR	LAST NAME ACHARYA	FIRST NAME ARUN	MIDDLE NAME
	RESIDENCE & CITIZENSHIP	CITY East Amherst	STATE OR FOREIGN COUNTRY New York	COUNTRY OF CITIZENSHIP U.S.A.
	POST OFFICE ADDRESS	POST OFFICE ADDRESS 85 Twilight Lane	CITY East Amherst	STATE OR COUNTRY N.Y.
206	FULL NAME OF INVENTOR	LAST NAME	FIRST NAME	MIDDLE NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE OR COUNTRY

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

SIGNATURE OF INVENTOR 201	SIGNATURE OF INVENTOR 202	SIGNATURE OF INVENTOR 203
DATE	DATE	DATE
SIGNATURE OF INVENTOR 204	SIGNATURE OF INVENTOR 205	SIGNATURE OF INVENTOR 206
DATE	DATE	DATE

FOR SOLE AND JOINT APPLICATIONS